


| REV | Description | Date        |
|-----|-------------|-------------|
| A00 | First Issue | 2004-SEP-24 |

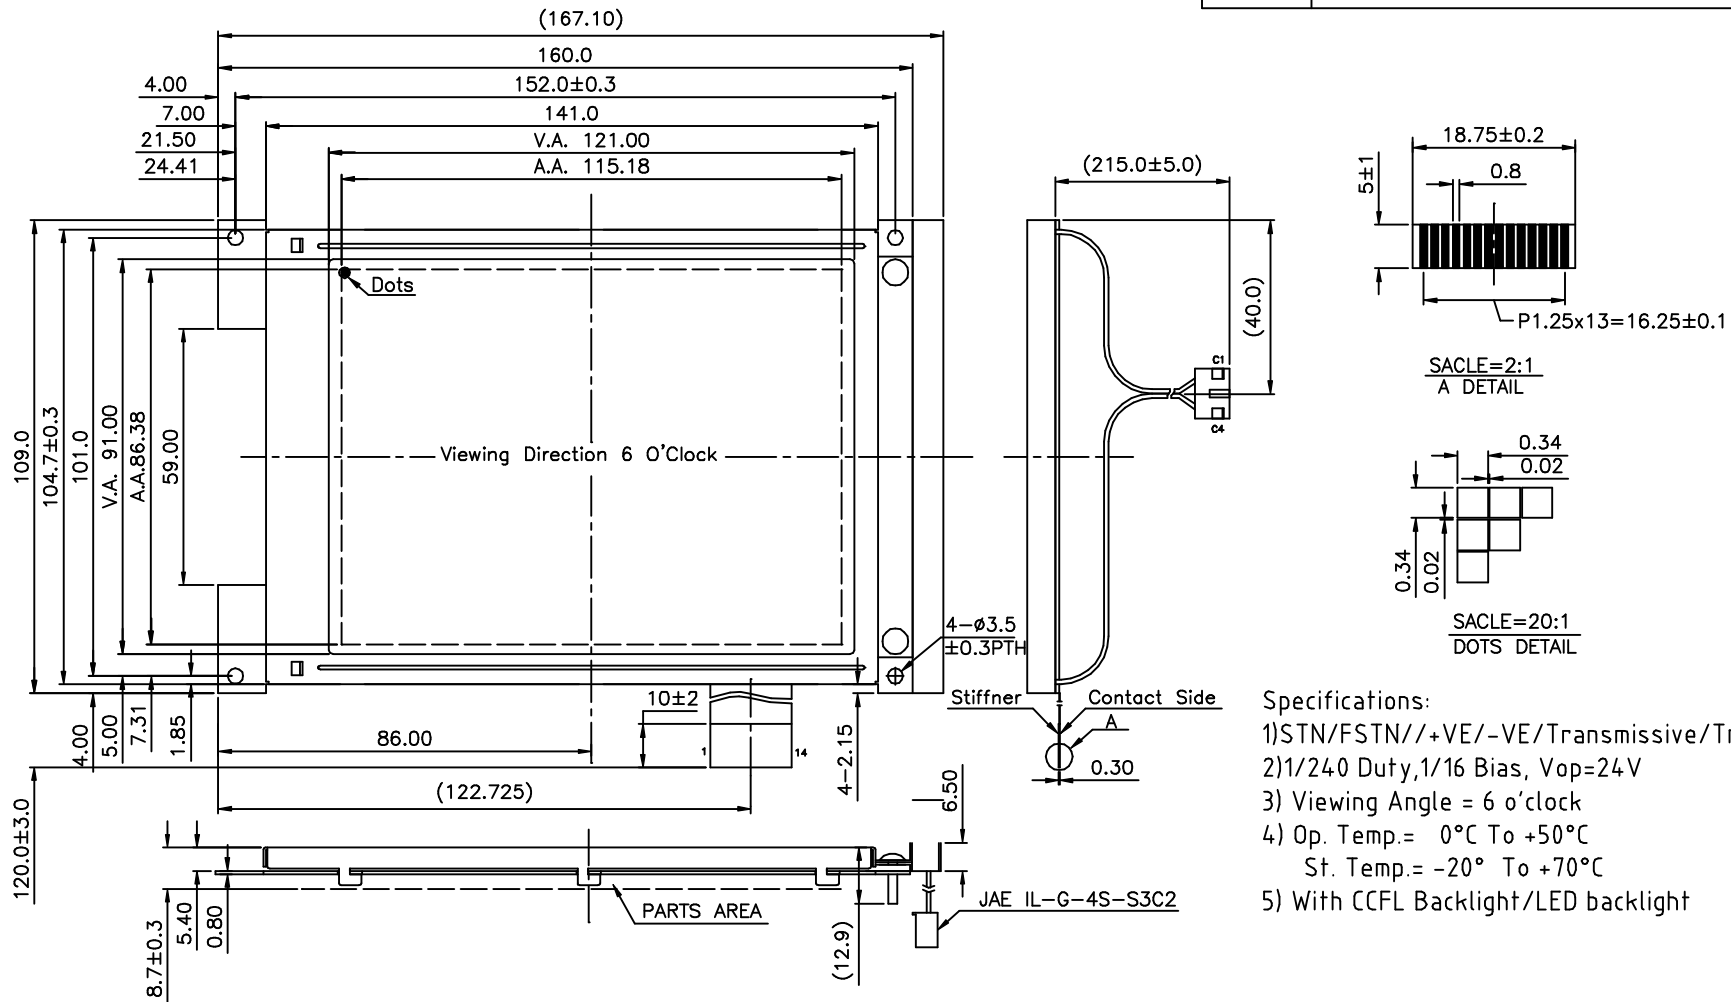

- Specifications:
- 1) STN/FSTN//+VE/-VE/Transmissive/Transflective Mode
  - 2) 1/240 Duty, 1/16 Bias, Vop=24V
  - 3) Viewing Angle = 6 o'clock
  - 4) Op. Temp.= 0°C To +50°C  
St. Temp.= -20° To +70°C
  - 5) With CCFL Backlight/LED backlight

PIN ASSIGNMENT:

| PIN#: | 1  | 2  | 3  | 4  | 5       | 6   | 7 | 8       | 9        | 10  | 11  | 12   | 13   | 14 |
|-------|----|----|----|----|---------|-----|---|---------|----------|-----|-----|------|------|----|
| NAME: | D0 | D1 | D2 | D3 | DISPOFF | FLM | M | LP(CL1) | XCK(CL2) | VDD | VSS | +24V | VADJ | FG |

CCFL BACKLIGHT PIN-OUT:

| C1       | C2 | C3 | C4       |
|----------|----|----|----------|
| CCFL HOT | NC | NC | CCFL GND |


LED BACKLIGHT PIN-OUT:

| C1   | C2 | C3 | C4   |
|------|----|----|------|
| LED+ | NC | NC | LED- |

| Description:          |  | MECHANICAL SPECIFICATIONS |  |
|-----------------------|--|---------------------------|--|
| Scale:                |  | Sheet : 1 of 1            |  |
| Unspecified Tol. ±0.3 |  | Unit mm                   |  |
| Approvals             |  | Date                      |  |
| Draw:                 |  | Project Number            |  |
| Check:                |  | TMTG320240B-XX            |  |
| Approve:              |  | Item Number               |  |
|                       |  | Do Not Scale This Drawing |  |
|                       |  | Projection                |  |



TRI-T COMPANY LIMITED



Projection